

Ultra S mini


A -

A A

: - 60/

365-385

21.1%

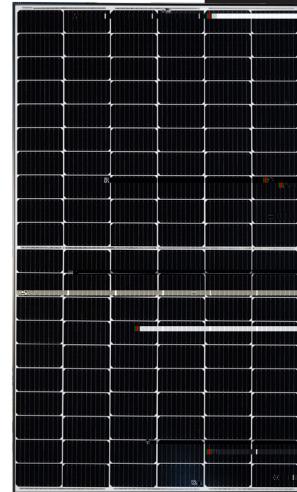

21.1%




2%



(5400) *

(3800

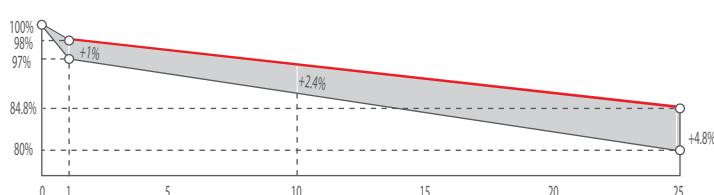

A

: 0.55%

: 25

: 2%

CE IEC 61730 IEC 61215
SA 8000
ISO 9001
ISO 14001
ISO 45001 Occupational Health and Safety
IEC TS 62941



Munich RE



STPXXXS - B60/Wnhm 365-385W



☒	166
☒	120 (6 20)
	1756 1039 35 (69.1 40.9 1.4)
	20.3 (44.8 .)
☒	3.2 (0.126 .)
	4.0 ^{2,} (-) 350 (+) 160
	68 (3 .)
	-40 ☒ +85 ☒
	1000 / 1500 ☒(☒)
	20 A
	0/+5




	385 - 60/	380 - 60/	375 - 60/	370 - 60/	365 - 60/
☒	☒	☒	☒	☒	☒
(/)	385	290.9	380	286.3	375
(/)	34.9	32.4	34.7	32.2	34.5
☒ (/A)	11.04	8.99	10.96	8.92	10.87
☒ (/)	41.5	39.0	41.3	38.9	41.1
☒ ☒ (/A)	11.72	9.46	11.64	9.39	11.57
(%)	21.1	20.8	20.6	20.3	20.0
☒ 1000 / ^{2,}	25 ☒ A =1.5;	: 800 / ^{2,}	20 ☒ A =1.5;	1 / ;	+/- 3%;



Graphs ☒ - & - ☒ (385)

(/)	42 2 ☒
☒	-0.36%/ ☒
☒	-0.304%/ ☒
☒	0.050%/ ☒

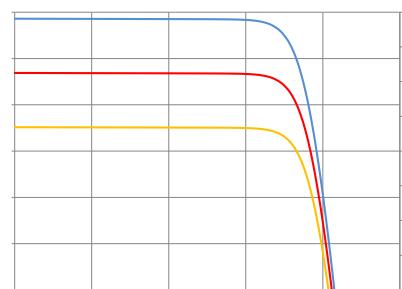

☒	20'☒	40'☒
	31	31
	6	26
	186	806
	1786 1130 1203	
	679	

1000 / ² 800 / ² 600 / ² 400 / ² 200 / ²